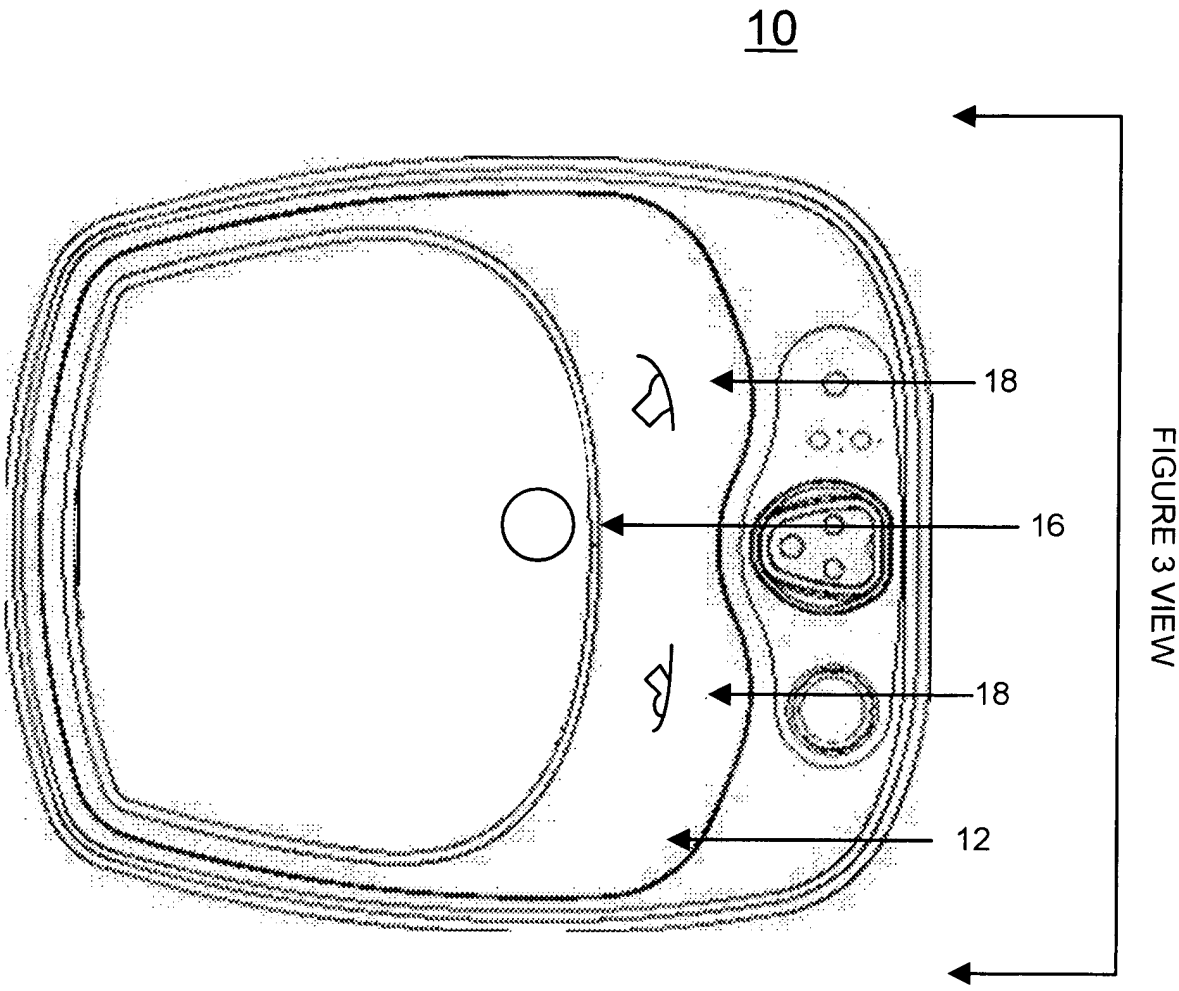


FIGURE 1

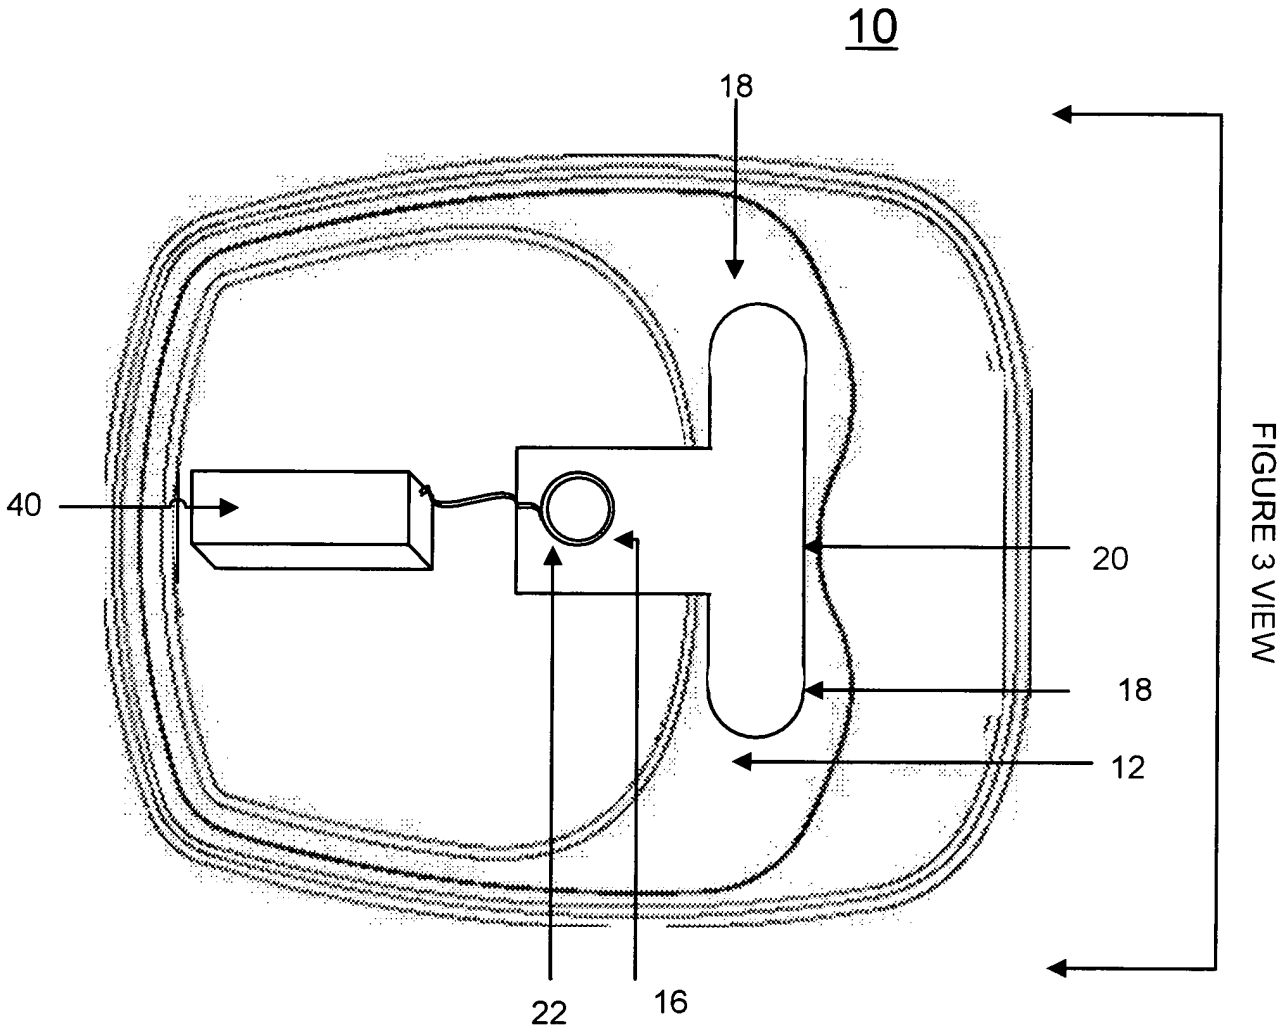


FIGURE 2

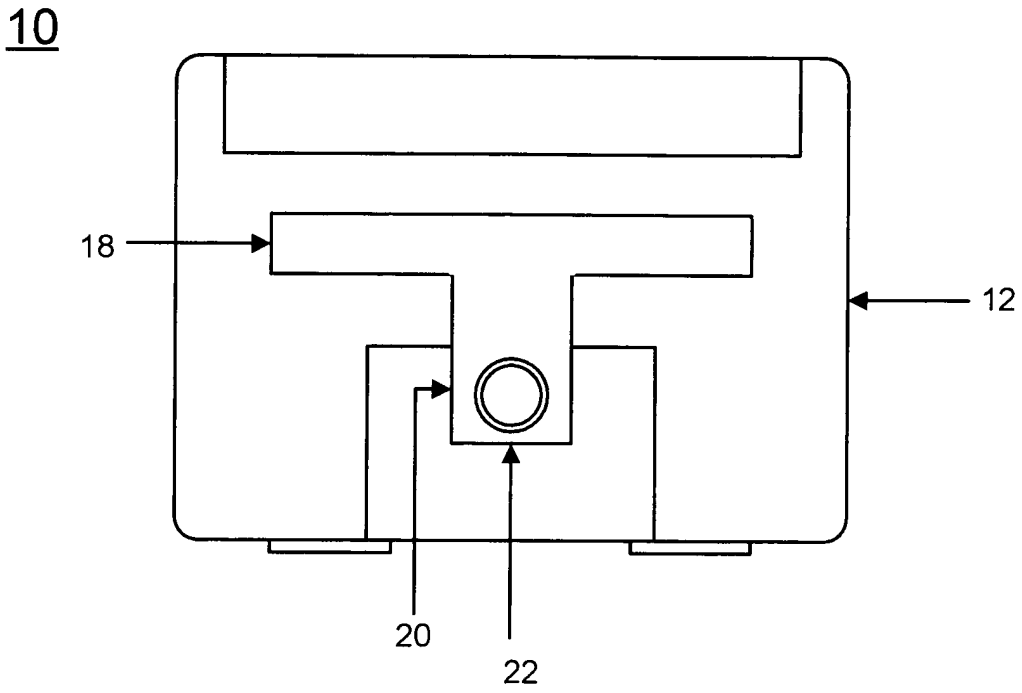


FIGURE 3

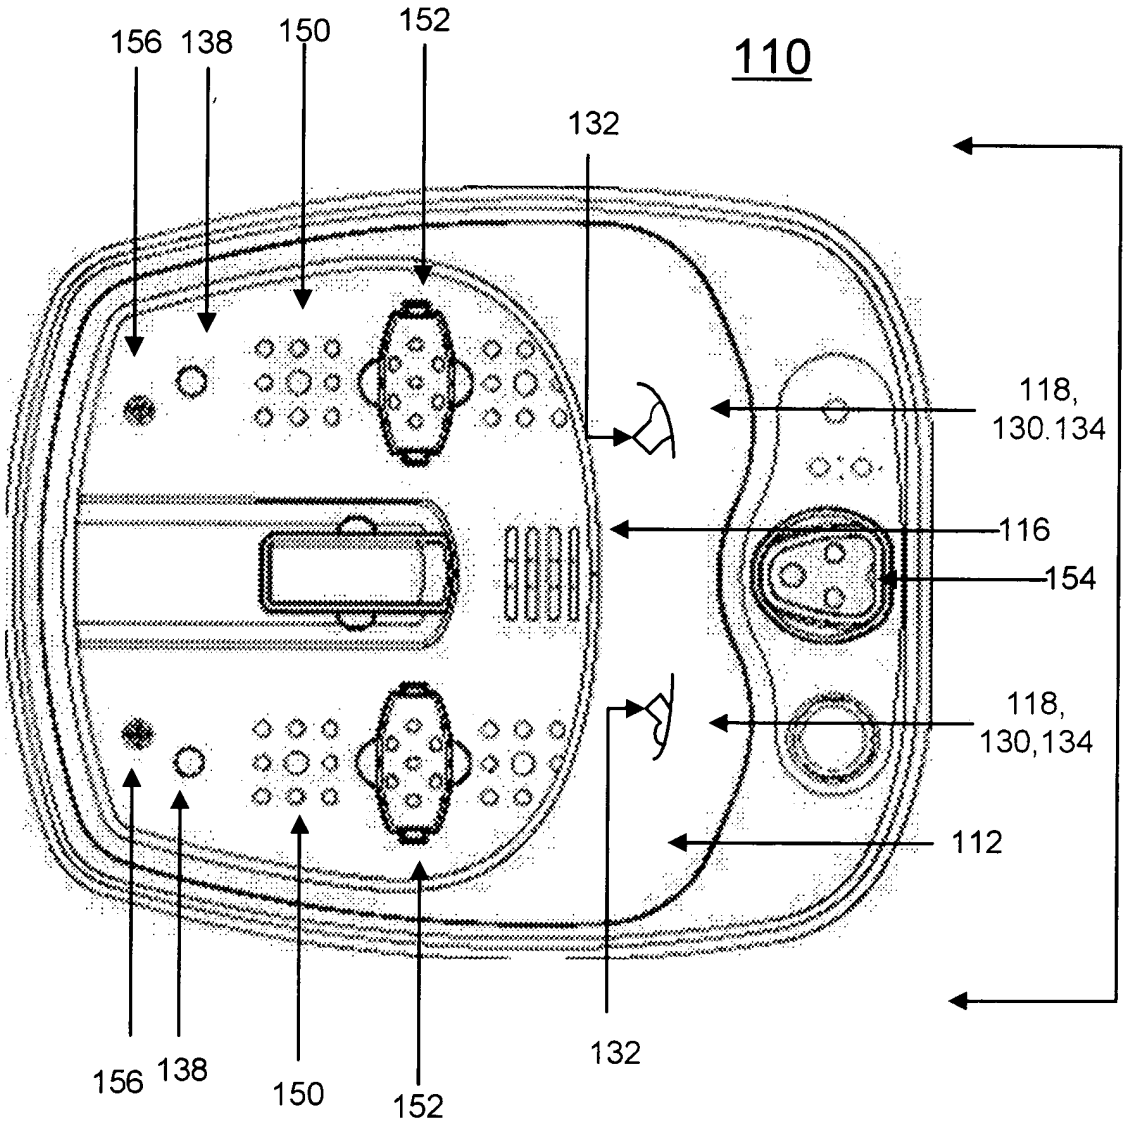
110
156
138
150
152
132
118,
130.134
116
154
118,
130,134
112
132
156
138
150
152
FIGURE 6 VIEW

FIGURE 4

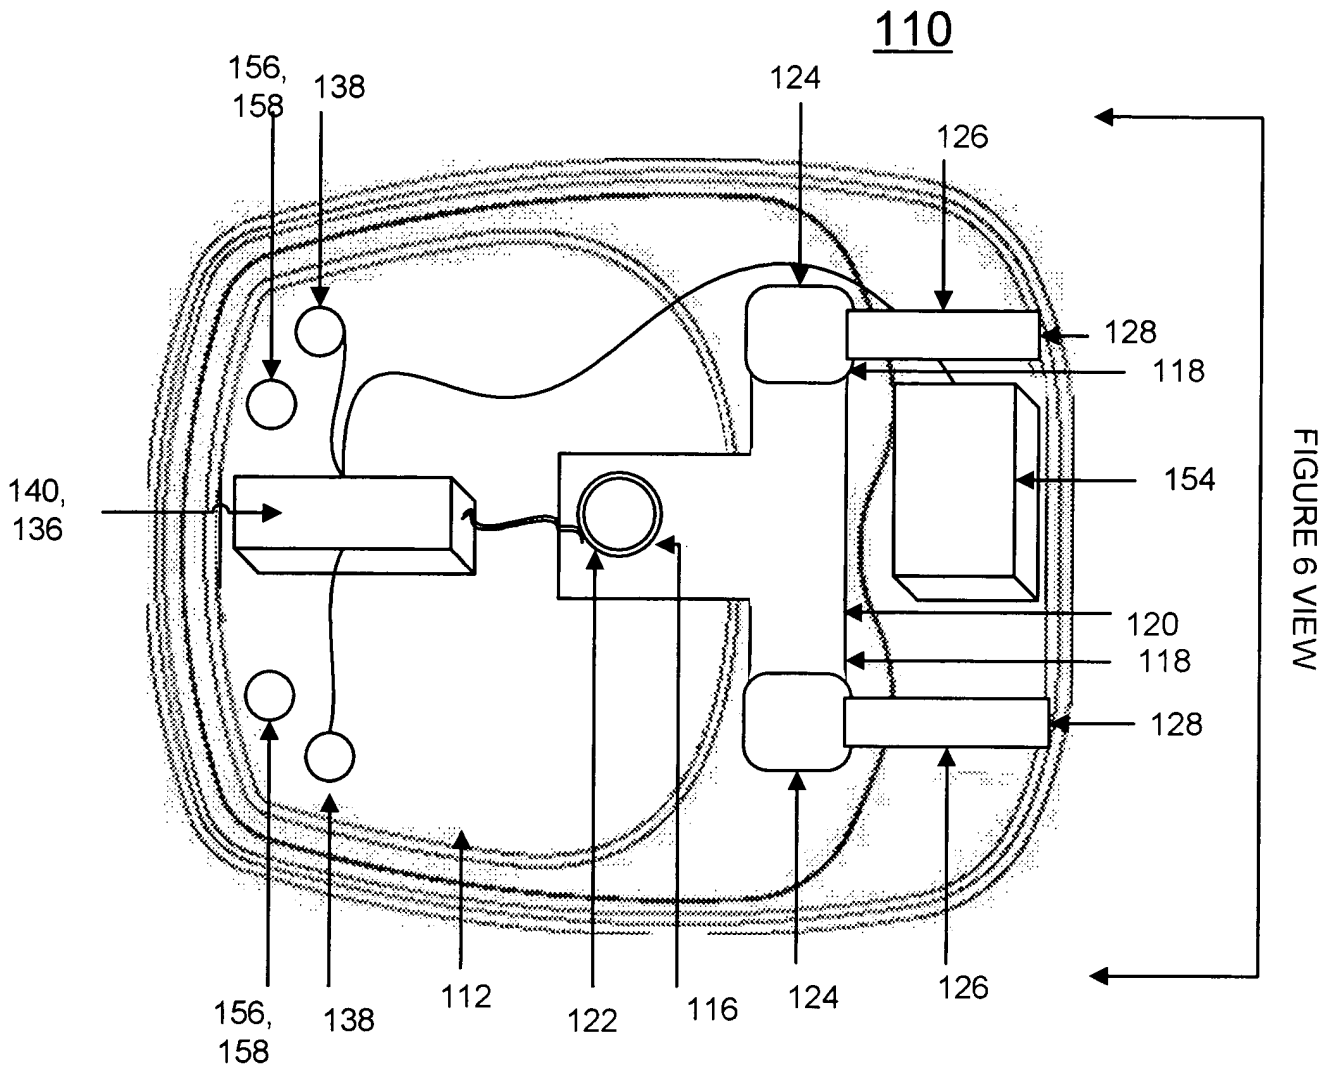
110
156, 158
138
124
126
128
118
154
140, 136
120
118
128
156, 158
138
112
122
116
124
126
FIGURE 6 VIEW

FIGURE 5

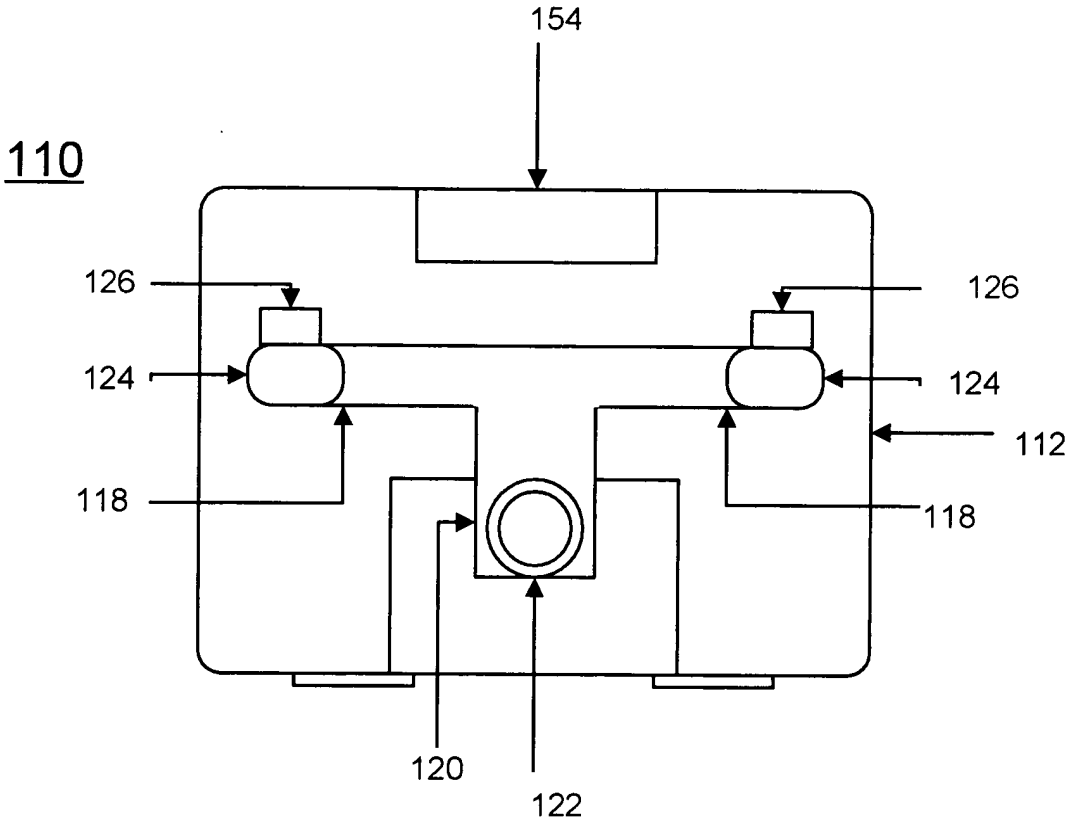


FIGURE 6

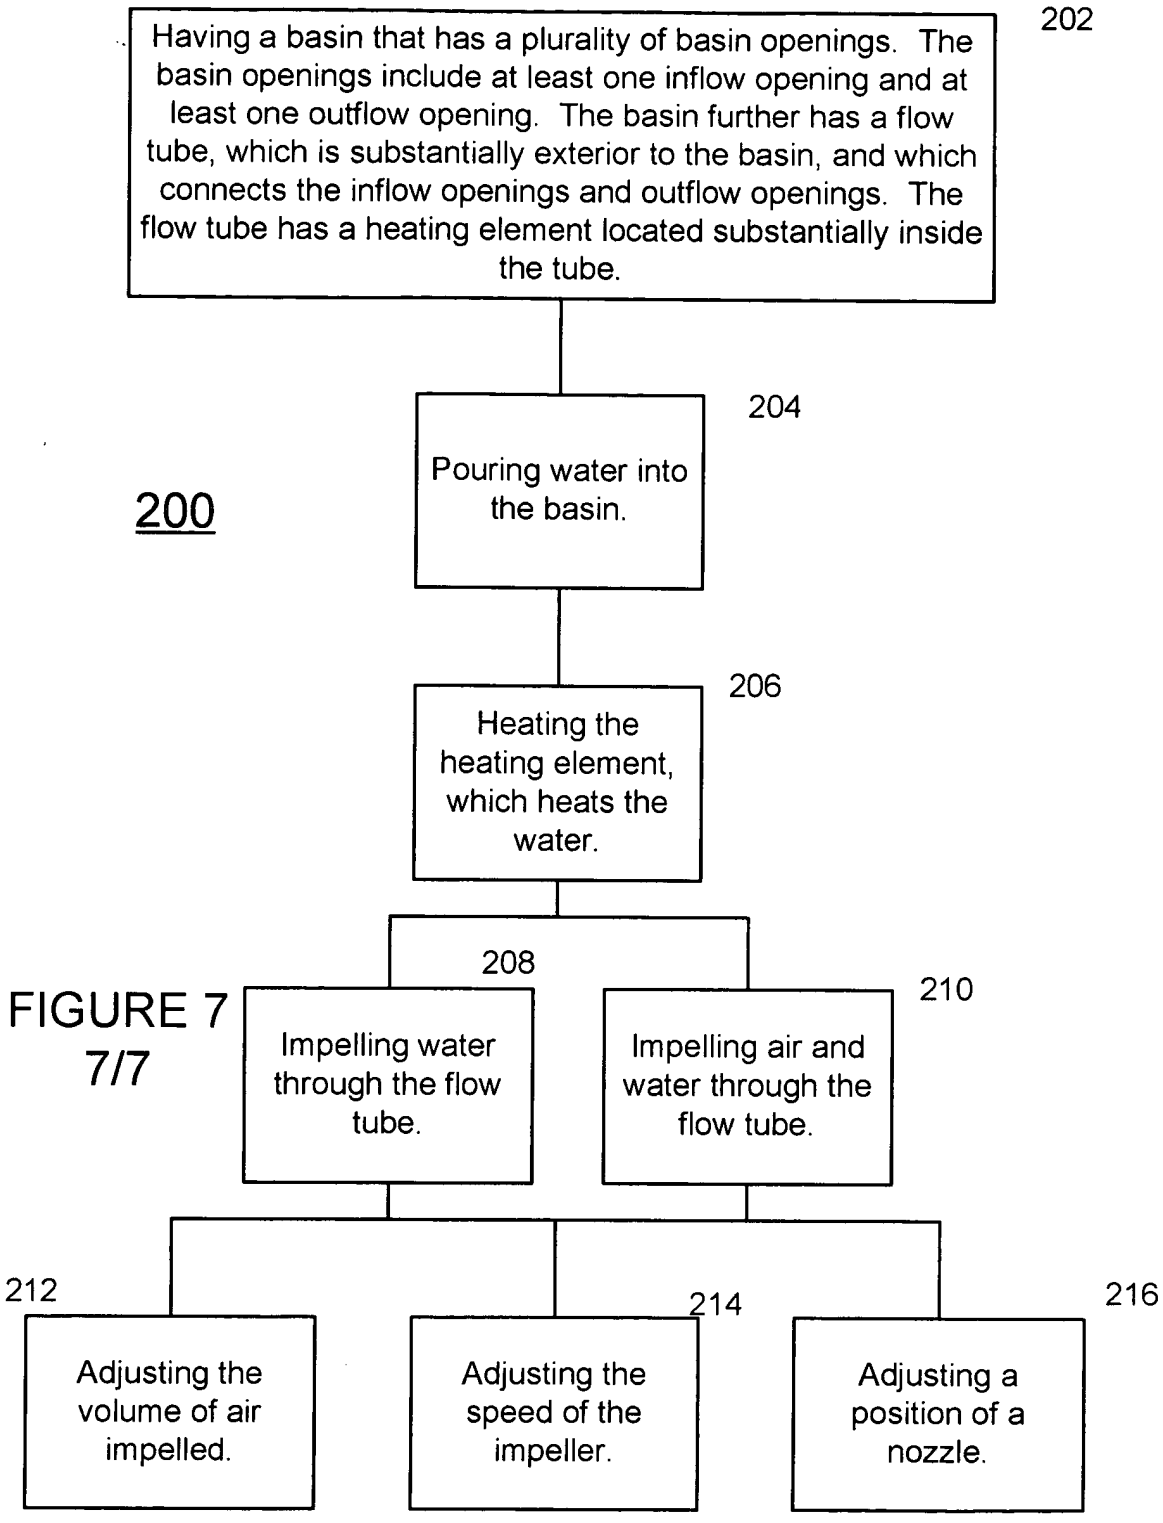
Having a basin that has a plurality of basin openings. The basin openings include at least one inflow opening and at least one outflow opening. The basin further has a flow tube, which is substantially exterior to the basin, and which connects the inflow openings and outflow openings. The flow tube has a heating element located substantially inside the tube.
202
200
Pouring water into the basin.
204
Heating the heating element, which heats the water.
206
208
Impelling water through the flow tube.
210
Impelling air and water through the flow tube.
212
Adjusting the volume of air impelled.
214
Adjusting the speed of the impeller.
216
Adjusting a position of a nozzle.

FIGURE 7
7/7